


5. DIZALICE, KOLICA I HVATALJKE Hoists, clamps

5.2. Hvataljke

Hvataljka za I-profil tip JG RX-lift

Beam clamp type JG RX-lift

2.1 2.2 CE

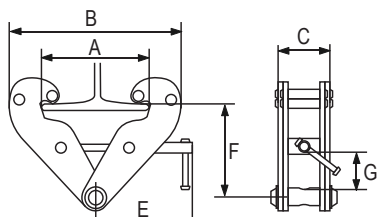

- EN 13155
- jednostavna instalacija na I profil
- brza prilagodba ručkom na otvor profila
- sigurnosna ručica zaključavanja





Nosivost (t)	Otvor hvataljke (t)	Širina I profila (mm)	A max. (mm)	B min. (mm)	C (mm)	E (mm)	F min. (mm)	F max. (mm)	G (mm)	Neto težina (kg)
Capacity	I-Beam width range	I-Beam width								Net weight
1.0	75-220	260	180	360	64	215	102	155	25	3,8
2.0	75-220	260	180	360	74	215	102	155	25	4,6
3.0	80-320	354	235	490	103	260	140	225	45	9,0
5.0	80-320	354	235	490	110	260	140	225	45	11,0
10.0	90-320	365	320	505	120	260	170	225	50	16,0

Hvataljka za I-profil tip WJC RX-lift

Beam clamp type WJC RX-lift

2.1 2.2 CE



- EN 13155
- jednostavna instalacija na I profil
- brza prilagodba ručkom na otvor profila
- sigurnosna ručica zaključavanja

Nosivost (t)	Otvor hvataljke (mm)	A max. (mm)	B min. (mm)	B max. (mm)	C (mm)	D (mm)	E (mm)	F min. (mm)	F max. (mm)	G (mm)	H (mm)	Neto težina (kg)
Capacity	I-Beam width range											Net weight
1.0	75-220	260	180	330	138	122	220	132	155	88	22	5,5
2.0	75-220	260	180	330	156	122	220	132	155	91	22	6,6
3.0	80-320	390	265	466	195	150	262	178	228	108	35	12,5
5.0	80-320	390	265	466	237	150	262	178	228	108	35	17,5
10.0	80-350	390	285	520	310	200	300	186	236	176	35	23