


1. ČELIČNA UŽAD I LANCI Wire ropes and chains

1.5. Inox uže

Inox uže AISI 316: 7×7


Stainless steel rope: 7×7

Promjer (mm)	Min. prekidna sila (kN) 1570 N/mm ²	Težina (kg/100m)
Diameter	MBL	Weight
1,0	0,56	0,38
1,5	1,27	0,86
2,0	2,25	1,54
2,5	3,52	2,40
3,0	5,1	3,50
4,0	9,0	6,10
5,0	14,10	9,6
6,0	20,3	13,80
8,0	36,1	24,60



CE 2.1 2.2 3.1 BL


- EN 12385-4
- nehrđajući čelik AISI 316
- čvrstoća žice: 1570 N/mm²



Inox uže AISI 316: 7×19


Stainless steel rope: 7×19

Promjer (mm)	Min. prekidna sila (kN) 1570 N/mm ²	Težina (kg/100m)
Diameter	MBL	Weight
2,0	2,27	1,52
2,5	3,55	2,38
3,0	5,10	3,43
4,0	9,10	6,10
5,0	14,20	9,50
6,0	20,50	13,70
8,0	36,40	24,40
9,0	46,0	30,90
10,0	56,8	38,10
12,0	81,8	54,90



CE 2.1 2.2 3.1 BL


- EN 12385-4
- nehrđajući čelik AISI 316
- čvrstoća žice: 1570 N/mm²

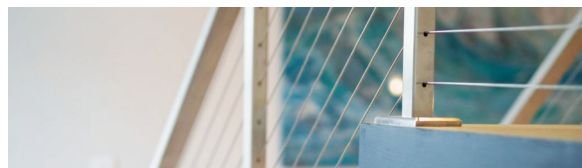

Inox uže AISI 316: 6×36WS

Wire rope: 6×36WS+IWRC

Promjer (mm)	Min. prekidna sila (kN) 1570 N/mm ²	Težina (kg/100m)
Diameter	MBL	Weight
12	80,60	60,20
13	94,60	70,7
14	109,0	82,0
16	143,0	107,0
18	181,0	135,0
20	221,0	167,0
22	271,0	202,0
24	322,0	241,0
26	378,0	283,0



CE 2.1 2.2 3.1 BL

- EN 12385-4
- nehrđajući čelik AISI 316
- čvrstoća žice: 1570 N/mm²