

1. ČELIČNA UŽAD I LANCI Wire ropes and chains


1.12. Lanci opće namjene

Lanac DIN 764 G30

Chain for commercial use acc. to DIN 764

2.1 2.2 BL

Promjer a (mm)	b (mm)	c (mm)	Prekidna sila (kN)	Težina (kg/m)
Diameter			Breaking load	Weight
4	16	14.00	7.0	0,31
5	18	18.20	11.8	0,51
6	21	21.50	16.5	0,74
8	28	29.00	32.0	1,31
10	35	36.00	50.0	2,0
12	42	41.00	70.0	2,98
13	45	47.00	80.0	3,50
14	49	48.00	92.0	4,06
16	56	58.00	125.0	5,20
18	63	65.00	160.0	6,50
20	70	72.00	200	8,20
23	80	83.00	250.0	11,0
26	91	94.00	320.0	14,0
28	98	100.00	360.0	16,5
30	105	108.00	415.0	19,0
32	115	119.00	500.0	22,5

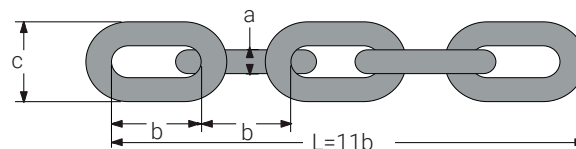

- lanac prema standardu: DIN 764
- komercijalni lanac za privez i sidrenje
- materijal: čelik ili AISI 316
- završna obrada: cinčani, crni ili polirani



Lanac za rudnike DIN 22252

High Strength Mining Chain

2.1 2.2 BL

d×p (mm)	p (mm)	Tolerancija p (mm)	a (mm)	b (mm)	5xp (mm)	Tolerancija 5xp (mm)	Težina (kg/m)	Ispitna sila Razred B (kN)	Ispitna sila Razred C (kN)	Ispitna sila Razred D (kN)
		Tolerance p				Tolerance 5xp		Test Load (Grade B)	Test Load (Grade C)	Test Load (Grade D)
10×40	40	±0.5	12	34	200	±0.7	1.9	85	100	130
14×50	50	±0.5	17	48	250	±0.88	4.0	150	200	250
18×64	64	±0.6	21	60	320	±1.22	6.6	260	330	410
22×86	86	±0.9	26	74	430	±1.51	9.5	380	490	610
26×92	92	±0.9	30	86	460	±1.60	13.7	540	680	850
30×108	108	±1.0	34	98	540	±1.89	18.0	710	900	1130
34×126	126	±1.2	38	109	630	±2.21	22.7	900	1160	1450

