


1. ČELIČNA UŽAD I LANCI Wire ropes and chains

1.13. Lančane priveznice

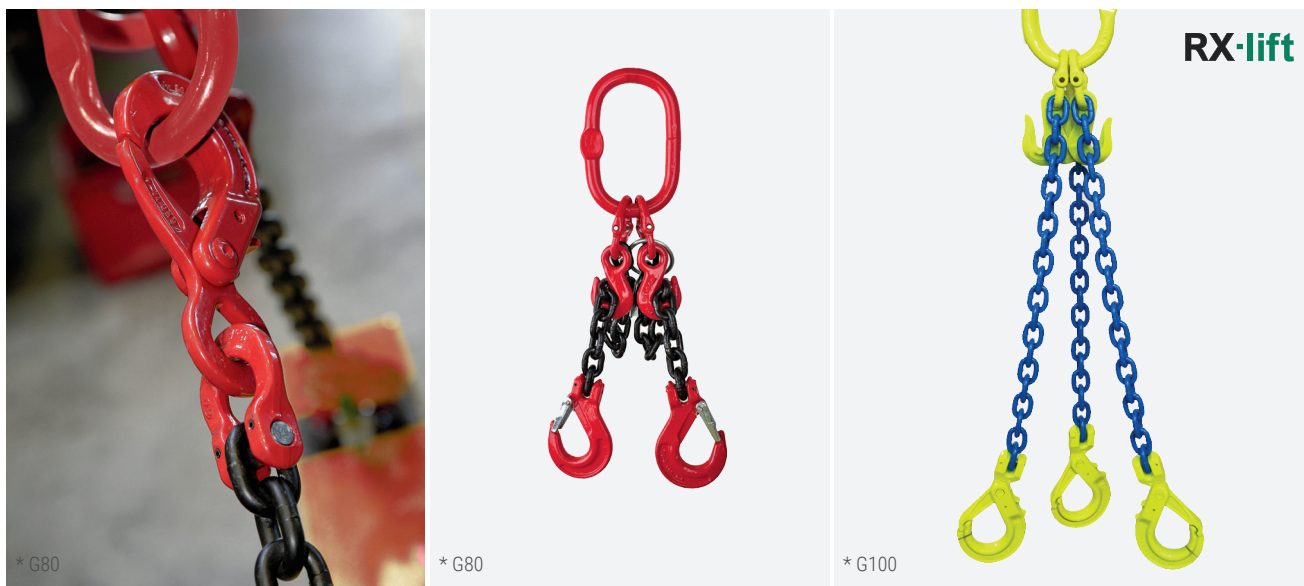

Lančane priveznice kvalitete G80 prema EN 818-4 RX-lift

G80 chain slings acc. to EN 818-4

Lanac G80 (mm)	Nosivost 1-krake priv. 0-90° (t)	Nosivost 2-krake priv. 0-45° (faktor 1,4) (t)	Nosivost 2-krake priv. 45-60° (faktor 1,0) (t)	Nosivost 3-krake i 4-krake priv. 0-45° (faktor 2,1) (t)	Nosivost 3-krake i 4-krake priv. 45-60° (faktor 1,5) (t)	Nosivost beskonačne priv. (faktor 1,6) (t)
Chain diameter	WLL 1-leg sling	WLL 2-leg sling	WLL 3-leg sling	WLL 1-leg sling	WLL 4-leg sling	WLL of endless sling
6	1,12	1,6	1,12	2,36	1,7	1,8
7	1,5	2,12	1,5	3,15	2,24	2,5
8	2,0	2,8	2,0	4,25	3,0	3,15
10	3,15	4,25	3,15	6,7	4,75	5,0
13	5,3	7,5	5,3	11,2	8,0	8,5
16	8,0	11,2	8,0	17,0	11,8	12,5
18	10,0	14,0	10,0	21,0	15,0	16,0
20	12,5	17,0	12,5	26,5	19,0	20,0
22	15,0	21,2	15,0	31,50	22,4	23,6
26	21,2	30,0	21,2	45,0	31,5	33,5
32	31,5	45,0	31,5	67,0	47,50	50

Lančane priveznice kvalitete G100 prema EN 818-4 RX-lift

G100 chain slings acc. to EN 818-4

Lanac G100 (mm)	Nosivost 1-krake priv. 0-90° (t)	Nosivost 2-krake priv. 0-45° (faktor 1,4) (t)	Nosivost 2-krake priv. 45-60° (faktor 1,0) (t)	Nosivost 3-krake i 4-krake priv. 0-45° (faktor 2,1) (t)	Nosivost 3-krake i 4-krake priv. 45-60° (faktor 1,5) (t)
Chain diameter	WLL 1-leg sling	WLL 2-leg sling	WLL 3-leg sling	WLL 1-leg sling	WLL 4-leg sling
6	1,5	2,1	1,5	3,10	2,2
7	1,95	2,7	1,95	4,0	2,9
8	2,5	3,5	2,5	5,2	3,7
10	4,0	5,6	4,0	8,4	6,0
13	6,8	9,5	6,8	14,2	10,2
16	10,0	14,1	10,0	21,0	15,0
20	16,0	22,5	16,0	33,6	24,0
22	20,0	28,2	20,0	42,0	30,0
26	27,0	38,0	27,0	56,7	40,50
32	40,0	56,4	40,0	84,0	60,0