

2. PRIBOR G80 I G100 G80 and G100 accessories


2.1. Pribor G80

Kuka okretna samozatvarajuća G80 RX083

Swivel selflocking hook G80

2.1 2.2 CE BL

| Promjer lanca (mm) | Nosivost (t) | B (mm) | C (mm) | D (mm) | L (mm) | T (mm) | E (mm) | Težina (kg/ kom) |
|--------------------|--------------|--------|--------|--------|--------|--------|--------|------------------|
| Chain dia. | WLL | | | | | | | Weight |
| 6-8 | 1,12 | 32,5 | 22 | 11,25 | 170 | 34 | 29 | 0,71 |
| 7/8-8 | 2,0 | 35,5 | 26 | 12,5 | 210 | 46 | 34 | 1,1 |
| 10-8 | 3,15 | 42 | 34 | 15 | 247 | 56 | 44 | 2,0 |
| 13-8 | 5,3 | 50 | 38,5 | 16 | 302 | 69 | 52 | 4,0 |
| 16-8 | 8,0 | 61 | 55 | 21,5 | 383 | 86 | 60 | 7,3 |
| 20-8 | 12,5 | 72 | 61 | 26 | 418 | 100 | 83 | 11,6 |
| 22-8 | 15 | 95 | 95 | 33 | 527 | 98 | 88 | 16,0 |
| 26-8 | 21,2 | 122 | 115 | 42 | 610 | 110 | 95,5 | 21,5 |
| 32-8 | 31,5 | 140 | 123 | 52 | 77 | 166 | 150 | 79 |

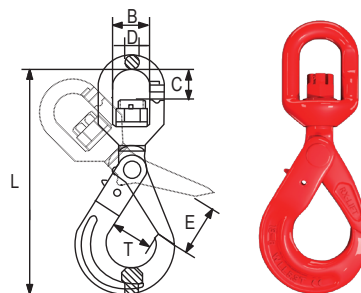


• EN 1677-3

Kuka sa osiguračem - francuski tip G80 RX315

Eye hook with latch G80

2.1 2.2 CE BL

| Nosivost (t) | Min. prekidna sila (t) | A (mm) | B (mm) | E (mm) | F (mm) | H (mm) | L (mm) | Φ (mm) | Težina (kg/ kom) |
|--------------|------------------------|--------|--------|--------|--------|--------|--------|--------|------------------|
| WLL | MBL | | | | | | | | Weight |
| 1.12 | 4.48 | 20.5 | 21 | 23 | 15 | 18 | 114.5 | 18 | 0.31 |
| 2 | 8 | 25.5 | 26 | 29.7 | 19.5 | 23.5 | 138.5 | 23 | 0.56 |
| 3.15 | 12.6 | 35 | 37.5 | 34 | 23 | 27.7 | 163.7 | 38 | 0.99 |
| 5.3 | 21.2 | 40.5 | 41.5 | 43 | 32 | 35.5 | 210 | 45 | 1.85 |




• EN 1677-2

Kuka sa okom i osiguračem G80 RX847

Eye sling hook with latch G80

2.1 2.2 CE BL

| Nosivost (t) | Min. prekidna sila (t) | A (mm) | E (mm) | M (mm) | N (mm) | H (mm) | L (mm) | Težina (kg/ kom) |
|--------------|------------------------|--------|--------|--------|--------|--------|--------|------------------|
| WLL | MBL | | | | | | | Weight |
| 1,12 | 4,48 | 9,5 | 22 | 70 | 17 | 19 | 110 | 0,27 |
| 2 | 8 | 16 | 27 | 86 | 24 | 23,3 | 144 | 0,655 |
| 3,15 | 12,6 | 19 | 33 | 103 | 24 | 28 | 190 | 1,22 |
| 5,3 | 21,2 | 23 | 40 | 135,7 | 38 | 37 | 227 | 2,43 |
| 8 | 32 | 28,5 | 44 | 161 | 41,5 | 41 | 257 | 3,81 |
| 12,5 | 50 | 27 | 53 | 187 | 46 | 50 | 301 | 5,9 |
| 15 | 70 | 32 | 72 | 240 | 57 | 59,5 | 337 | 9,1 |

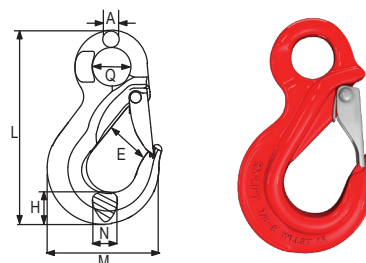


• EN 1677-2

Kuka sa okom i lijevanim osiguračem G80 RX334

Eye sling hook with cast latch G80

2.1 2.2 CE BL

| Nosivost (t) | Min. prekidna sila (t) | M (mm) | D (mm) | E (mm) | H (mm) | B (mm) | L (mm) | Težina (kg/ kom) |
|--------------|------------------------|--------|--------|--------|--------|--------|--------|------------------|
| WLL | MBL | | | | | | | Weight |
| 1.12 | 4.48 | 20.5 | 9 | 18.5 | 20 | 68 | 109 | 0.3 |
| 2 | 8 | 25 | 11 | 22 | 27 | 84 | 133.5 | 0.55 |
| 3.15 | 12.6 | 34 | 14 | 28 | 33 | 102.5 | 167.5 | 1.05 |
| 5.3 | 21.2 | 42.5 | 17.5 | 35 | 40 | 128.5 | 207.5 | 1.75 |
| 8 | 32 | 52 | 22 | 43 | 48 | 156.5 | 253 | 3.2 |
| 12,5 | 50,0 | 62 | 26 | 51,5 | 56 | 187 | 300 | 60 |

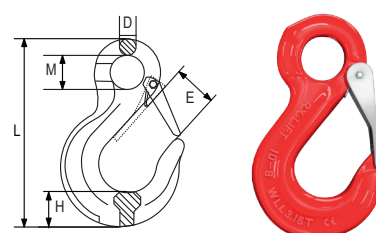

• EN 1677-2