

2. PRIBOR G80 I G100 G80 and G100 accessories


2.1. Pribor G80

Kuka sa okom i lijevanim osiguračem G80 RX013

Eye sling hook with cast latch G80

2.1 2.2 CE BL

Nosivost (t)	Min. prekidna sila (t)		B (mm)	E (mm)	D (mm)	A (mm)	L (mm)	Težina (kg/kom)
	WLL	MBL						
1.12	4.48	9	24	21	20	108	0.3	
2	8	11	30	26	25	133	0.4	
3.15	12.6	15	34	39	38	167	0.9	
5.3	21.2	19	39	54	43	213	1.7	
8	32	23	46	64	50	255	3.2	
12.5	50	24	48	80	63	305	5.8	
15	60	32	71	100	62	348	8.5	
21.2	84.8	35	81	82	64	394	13	

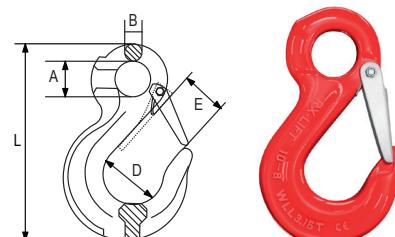


• EN 1677-2

Kuka sa osiguračem G70 320A

Eye sling hook G70 320A

2.1 2.2 BL

Nosivost 320A (t)	Min. prekidna sila (t)	D (mm)	E (mm)	H (mm)	K (mm)	L (mm)	M (mm)	Težina (kg/kom)
0,75	3,75	16	18	17	72	97	16	0,21
1,0	5,0	19	22	20,5	82	112	16	0,27
1,5	7,5	23	24,5	21,5	94	126	17,5	0,4
2,0	10,0	28	25	26	104,5	142	21	0,6
3,0	15,0	31	27	28	120	163	23	0,84
5,0	25,0	39	35,5	40	146	203	33	1,81
7,0	35,0	51	44	45	187,5	255	38	3,35
11,0	55,0	62	55	57	231,5	317	46	6,1
15,0	75,0	73	57	66	262	360	55	9,6

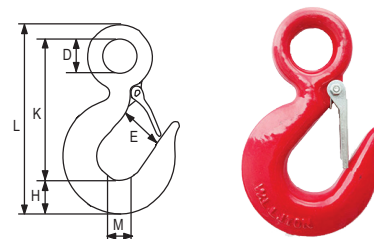


• materijal G70

Kuka sa okom i osiguračem G80 RX039

Eye sling hook with latch G80

2.1 2.2 CE BL

Nosivost (t)	Min. prekidna sila (t)		D (mm)	E (mm)	H (mm)	K (mm)	L (mm)	Težina (kg/kom)
	WLL	MBL						
1.12	4.48	19	22	19	80	110	0.28	
2	8	28	25	25	103	140.5	0.65	
3.15	12.6	31	27.5	28	118	162	0.94	
5.3	21.2	39	33	35	145	201	1.95	
8	32	51	40	45	180	256	3.77	
12.5	50	62	51	57	230	317	6.8	
15	60	73	57	70	260	360	9.8	
21.2	84.8	89	75	76	318	434	16.25	
31.5	126	90	98	91	360	495.5	27.2	

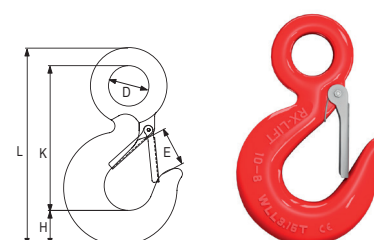

• EN 1677-2

Kuka sa osiguračem - DIN689

Eye hook with latch DIN689

2.1 2.2 BL

Nosivost (t)	B (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	Težina (kg/kom)
0,25	54	8	12	64	89	18	0,15
0,50	72	10	16	85	118	24	0,35
1,0	98	1	20	116	160	33	0,80
1,6	116	316	26	138	190	39	1,40

