

3. SPOJNI PRIBOR General hardware

3.1. Škopci


RX-lift

Škopac komercijalni ravni RX-lift

Commercial type dee shackle RX-lift

2.1

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Min. prekidna sila (kN) MBL	Težina (kg/100 kom) Weight (kg/100 pcs)
5	5	10	10	19	1,6	1,4
6	6	12	12	25	2,0	2,2
8	8	16	16	32	4,0	5,2
10	10	20	20	38	6,4	11,8
11	11	22	22	44	8,0	14
12	12	24	24	51	10,4	20,5
14	14	28	28	53	13,0	29,4
16	16	32	32	64	16,0	42,6
20	20	40	40	76	22,0	72,6
22	22	44	44	89	30,0	108
25	25	50	50	100	42,0	185
28	28	56	56	115	60,0	226
32	32	64	64	127	70,0	358
38	38	76	76	152	100,0	602
45	45	90	90	180	140,0	1080

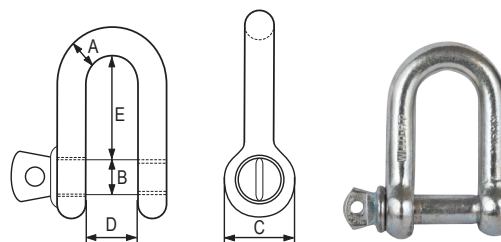


• Škopac za privez, nije za dizanje tereta

Škopac komercijalni trbušasti RX-lift

Commercial type bow shackle RX-lift

2.1

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Min. prekidna sila (kN) MBL	Težina (kg/100 kom) Weight (kg/100 pcs)
5	5	10	10	20	15	1,6	1,4
6	6	12	12	24	18	2,0	2,4
8	8	16	16	32	24	4,0	5,4
10	10	20	20	40	30	6,4	10,6
11	11	22	22	44	33	8,0	16,4
12	12	24	24	48	36	10,4	19,4
14	14	28	28	56	42	13,0	44
16	16	32	32	64	48	16,0	44,2
20	20	40	40	80	60	22,0	82,8
22	22	44	44	88	66	30,0	116
25	25	50	50	100	75	42,0	168
28	28	56	56	112	84	60,0	232
32	32	64	64	128	96	70,0	382
38	38	76	76	152	114	100,0	623
45	45	90	90	180	135	140,0	1120

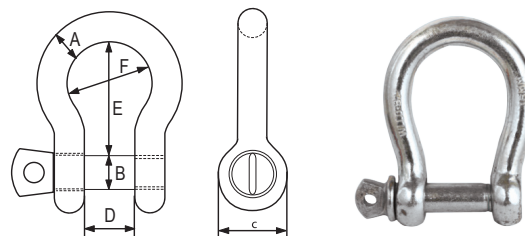

• Škopac za privez, nije za dizanje tereta

