

1. ČELIČNA UŽAD I LANCI Wire ropes and chains


1.12. Lanci opće namjene

Lanac DIN 763 G30

Chain for commercial use acc. to DIN 763

Promjer a (mm)	b (mm)	c (mm)	Prekidna sila (kN)	Težina (kg/m)
Diameter			Breaking load	Weight
2	22	8	1,25	0,06
3	26	12	3,25	0,15
4	32	16	6,0	0,27
5	35	20	10,0	0,43
6	42	24	14,0	0,63
7	49	28	18,0	0,86
8	52	32	25,0	1,10
9	59	36	32,0	1,41
10	65	40	40,0	1,75
11	72	44	47,5	2,11
12	78	48	56,5	2,55
13	82	52	63,0	2,95
16	100	64	100,0	4,45
18	113	70	127,0	5,65
20	120	75	160,0	7,00
22	127	82	190,0	8,55
25	140	85	245,0	10,9
28	152	96	300,0	13,9
32	171	108	400,0	18,2
36	216	120	610	22,5

2.1 2.2 BL

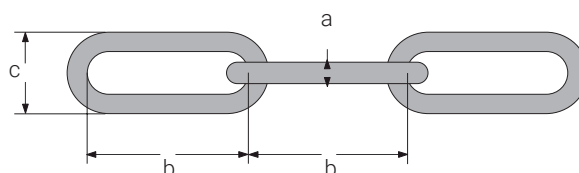

- lanac prema standardu: DIN 763
- komercijalni lanac za privez i sidrenje
- materijal: čelik ili AISI 316
- završna obrada: cinčani, crni ili polirani




Lanac DIN 766 G30

Chain for commercial use acc. to DIN 766

Promjer a (mm)	b (mm)	c (mm)	Prekidna sila (kN)	Težina (kg/m)
Diameter			Breaking load	Weight
2	12	7,5	-	0,07
3	16	11	-	0,16
4	16	13	7,0	0,32
5	18,5	17	12,5	0,50
6	18,5	20,2	16,5	0,80
7	22	23,8	25,0	1,10
8	24	27,2	32,0	1,40
9	27	30,6	40,0	1,80
10	28	34	50,0	2,20
11	31	37,4	60,0	2,70
12	36	40,8	70,0	3,10
13	36	44,2	80,0	3,80
14	41	47,6	92,0	4,40
16	45	54,4	125,0	5,70
18	50	61,2	160,0	7,30
19	53	64,6	180,0	7,97
20	56	68,0	200,0	9,00
22	62	75,0	250,0	11,0
26	73	88,4	320,0	15,0
28	78	95,2	370,0	19,5
30	84	102	450,0	23,0

2.1 2.2 BL

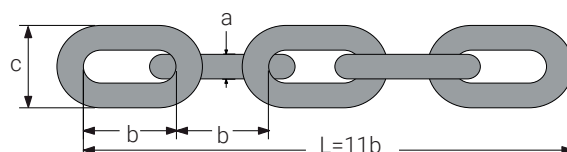

- lanac prema standardu: DIN 766
- komercijalni lanac za privez, sidrenje i brodska vitla
- materijal: čelik ili AISI 316
- završna obrada: cinčani, crni ili polirani

