

## 3. SPOJNI PRIBOR General hardware




### 3.4. Stezaljke

#### Stezaljka pojačana EN 13411-5 tip B Green Pin

Wire rope clip acc. to EN 13411-5 G-6240 Green Pin



Promjer č. užeta (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Min. br. stezaljki na promjer užeta (kom)	Torzijska vrijednost (Ft. Lbs)	Težina (kg/100 kom)
Dia. wire rope								Min. no of clips required)	Torque value	Weight
3-4	5	24	12	11	24	21	10	2	4,5	2
5	6	31	15	13	29	24	13	2	7,5	4
6-7	8	34	19	13	37	30	18	2	15	8
8	10	45	22	19	43	33	19	3	30	13
9-10	11	49	26	19	49	42	25	3	45	19
11	12	60	30	25	58	46	26	3	65	33
12-13	13	61	30	25	58	48	31	3	65	34
14-15	14	72	33	32	63	52	31	3	95	45
16	14	74	33	32	64	54	36	3	95	45
18-20	16	86	38	37	72	57	38	4	130	68
22	19	98	45	41	80	62	40	4	225	108
24-26	19	108	48	46	88	67	47	5	225	113
28-30	19	117	51	51	91	73	48	6	360	140
32-34	22	130	59	54	105	79	56	7	360	207
36	22	140	60	59	108	79	58	7	360	234
38-40	22	147	66	60	112	85	64	8	430	254
41-42	25	161	70	67	121	92	67	8	590	329
44-46	29	174	78	70	134	97	76	8	750	441
48-52	32	195	86	78	150	113	85	8	750	603
56-58	32	213	98	81	162	116	100	8	750	707
62-65	32	227	105	87	168	119	113	9	750	806
68-72	32	243	112	91	174	127	124	10	750	1015
75-78	38	271	121	98	194	135	136	10	1200	1472

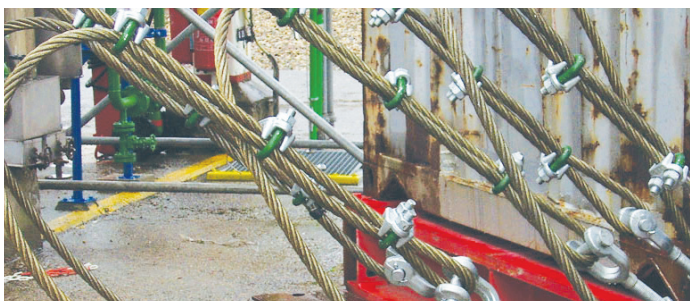

- Standard: EN 13411-5 tip B
- Završna obrada: vruće galv., osim elektro-galv. 5,6,8 i 10 mm
- kovani visokootporni čelik